



STEP
1


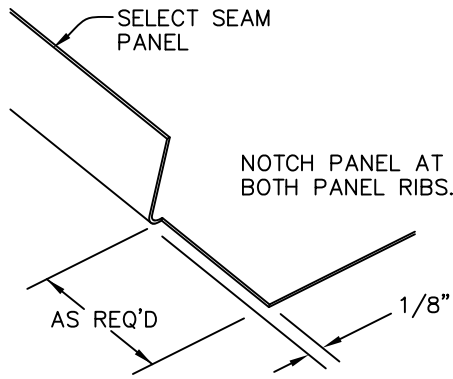


STEP
2

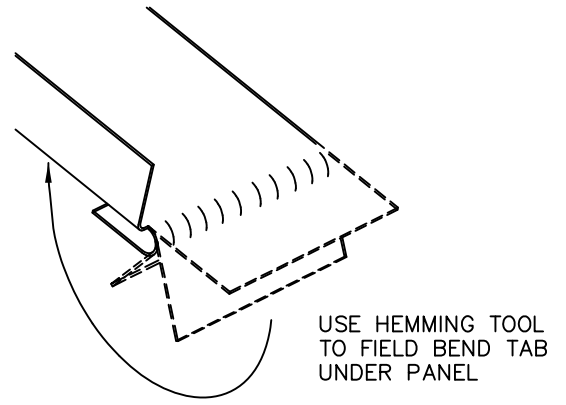


STEP
3

APPLY 3/8" BEAD OF NON-SKINNING BUTYL SEALANT ON OUTSIDE OF MALE RIB AS SHOWN

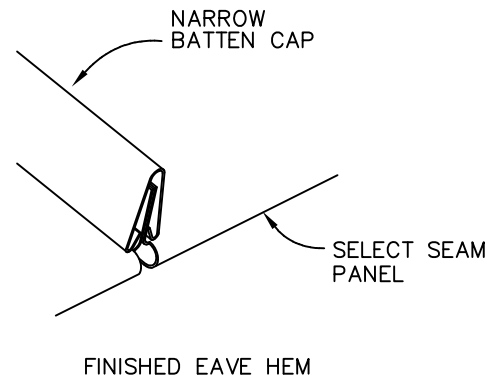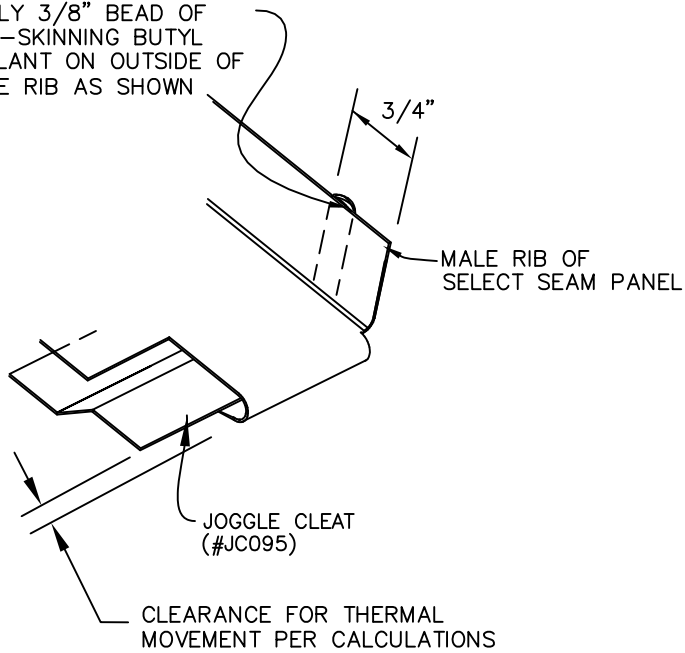

SELECT SEAM
NARROW BATTEN



EAVE HEM

SSNB-05