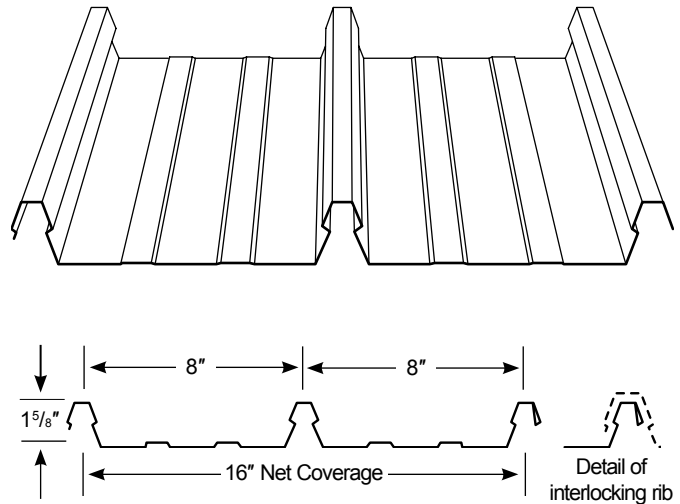


**Klip-Rib** is a high performance-rated, standing seam, snap-down panel offering quick installation and exceptional strength.

**Klip-Rib** is ideal for applications requiring high wind uplift resistance combined with ease of assembly. Common applications include commercial, educational and institutional roofs.



Section Properties									Standard Finishes	
Gauge	Base Steel Thickness (in)	Yield (ksi)	Tensile (ksi)	Wt. (lbs/ft <sup>2</sup> )	I+ (in <sup>4</sup> /ft)	S+ (in <sup>3</sup> /ft)	I- (in <sup>4</sup> /ft)	S- (in <sup>3</sup> /ft)	Metallic Coating	Paint System
26	0.0173	80	82	1.11	0.0935	0.0772	0.0668	0.0625	AZ50	Cool Dura Tech™ <i>nt</i>
24	0.0232	50	65	1.39	0.1240	0.1037	0.0925	0.0857	AZ50	Cool Dura Tech™ <i>5000</i>
22	0.0294	50	65	1.75	0.1545	0.1298	0.1185	0.1097	AZ50	Cool Dura Tech™ <i>mx</i>

**NOTES:** The moments of inertia, I\* and I-, presented for determining deflection are:  $(2I_{Effective} + I_{Gross})/3$

## standard features

- Custom manufactured sheet lengths from 5'-0" to up to 100'-0".
- Available in 26, 24, 22 gauge in standard finishes – Refer to AEP Span Color Charts for full range of color options, prints textures, finishes and paint systems.
- ZINCALUME® coating, ASTM A-792, is standard and backed by a corrosion warranty on painted or unpainted panels.
- Performance testing: Air – ASTM E1680, Water – ASTM E1646, Wind – UL 580, Class 90 and Class 60, ASTM E1592.
- Minimum recommended slope 1:12.
- Snap Together Seams - Unique clip and lock seam reduces labor by eliminating field seaming.
- Stretch wrap packaging - Panels are rigid enough to be shipped with minimal protective packaging.
- All colors meet a minimum SRI of 29 and one color, Regal White has a SRI of 88.
- Panel evaluated by accredited third party. All structural performance data is contained within an IBC/IRC 2015 code compliance report.







## optional features

- Short cut sheets from 5'-0" to 1'-0". Additional fees and lead times apply.
- Long Lengths - Exceptional structural capacity allows lengths up to 100'-0". Additional charges for lengths over 45'-0".
- Crimp curving –
  - 22 & 24 gauge – maximum length 30'-0" Minimum outside radius 24"
- Stucco embossed option available. Subject to 700 square feet minimum order.
- Custom colors, thick film primer and/or clear coat paint finished available. Subject to 4,000 square feet minimum order.

Gauge	Span	Cond.	Allowable Inward Loads (lbs/ft <sup>2</sup> ) per Span (ft.-in.)								
			3' - 0"	3' - 6"	4' - 0"	4' - 6"	5' - 0"	5' - 6"	6' - 0"	6' - 6"	7' - 0"
26	Single Span	W/Ω	205	151	116	91	74	61	51	44	38
		L/180	-	-	-	90	65	49	38	30	24
	Double Span	W/Ω	163	120	92	72	59	49	40	35	30
		L/180	-	-	-	-	-	-	-	-	-
	Triple Span	W/Ω	201	149	114	90	74	60	51	43	37
		L/180	-	-	-	-	-	-	-	-	-
24	Single Span	W/Ω	230	169	129	102	83	68	57	49	42
		L/180	-	-	-	-	-	-	-	-	-
	Double Span	W/Ω	185	137	106	83	67	56	47	40	35
		L/180	-	-	-	-	-	-	-	-	-
	Triple Span	W/Ω	230	170	130	104	84	69	58	50	43
		L/180	-	-	-	-	-	-	-	-	-
22	Single Span	W/Ω	288	212	162	128	104	86	72	61	53
		L/180	-	-	-	-	-	81	63	49	39
	Double Span	W/Ω	237	175	134	107	86	72	59	51	44
		L/180	-	-	-	-	-	-	-	-	-
	Triple Span	W/Ω	293	217	168	133	107	90	75	64	55
		L/180	-	-	-	-	-	-	-	-	-

Gauge	Allowable Outward Loads (lbs/ft <sup>2</sup> ) per Span (ft.-in.)									
	1' - 0"	1' - 6"	2' - 0"	2' - 6"	3' - 0"	3' - 6"	4' - 0"	4' - 6"	5' - 0"	
26	58	49	42	36	32	28	26	24	24	
24	98	88	78	69	61	54	48	42	37	
22	181	157	135	116	99	84	72	62	54	

LOADING TABLE LEGEND	
W/Ω - Allowable panel strength	
L - Span (Inches)	
L/180 - Load limited by a deflection of 1/180 of the span	
W - Distributed load	
Inward Loads	Single span 
	Double span 
	Triple span 
Outward Loads	

#### NOTES:

- The information in these tables applies to uniform loads only.
- Upper values based on allowable panel strength. Bottom values based on allowable service load deflection of L/180.
- "-" denotes that capacities are limited by panel strength vs. deflection.
- Steel conforms to ASTM A792 (ZINCALUME®) 50,000 psi minimum yield.
- Values are based on AISI S100-07/S2-10.
- Maximum allowable outward load capacities are shown and dependent upon fastener-to-substrate capacities. Refer to IAPMO-UES report #ER-0309 for specific product capacities.
- Spans greater than 5'-0" do not have a UL90 rating but are acceptable under certain conditions.
- For slopes lower than 1:12, applications in snowfall areas, or spans greater than 5', please contact your AEP Span Representative for recommendations.

Specifications subject to change without notice.

**Oil Canning** : All flat metal surfaces can display waviness commonly referred to as "oil canning". "Oil canning" is an inherent characteristic of steel products, not a defect, and therefore is not a cause for panel rejection.



Customer Service Center  
Tacoma, WA.

Phone: 800-733-4955

Fax: 253-272-0791

For most current versions of literature please visit  
[www.aepspan.com](http://www.aepspan.com)